


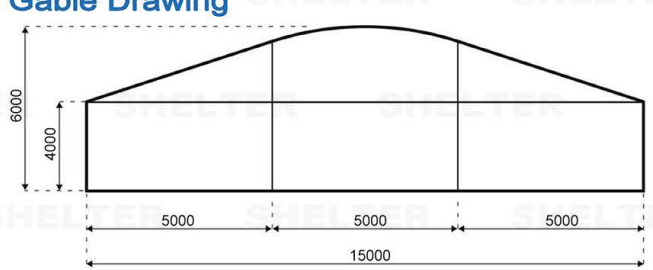
SHELTER ARCH-SERIES	
TENT SPECIFICATIONS	
Model	A15
Span Width	15m
Eave Height	4.00m
Ridge Height	6.00m
Bay Distance	5m
Roof Pitch	18°
Longest Component	5.50m
Maximum Length	Unlimited in 5-meter increments
Max. WindLoad	120km/h (0.60kN/m ²)
FRAMEWORK	
Main Profiles	112*203*4mm (4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6
COVER	
Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701
CONNECTING COMPONENTS	
Hot Dipped, Structural Grade Corrosive Resistant Galvanized Steel	

ARCH-SERIES DRAWING

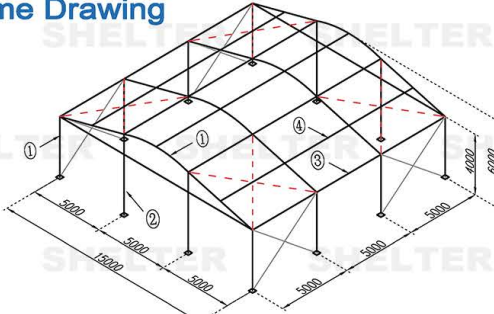
Rendering







Gable Drawing



Frame Drawing



Profile Specifications

Side Leg Roof Beam Curved Beam	Gable Jamb	Eave Purlin	Roof Purlin
①	②	③	④
			



SHELTER STRUCTURES PRODUCT GALLERY



APPLICATION

- VIP Hospitality
- Wedding Venue
- Annual Gala
- Pop up Store
- Sports Arena
- Event Center in Summer Camp
- Reception Hall

FEATURES

- Unique Curved Roof
- Better Drainage Performance
- Roof Extension
- Optional PVC Pattern
- Customized Frame Color
- Relocatable



**SHELTER STRUCTURES
TENT MANUFACTURER**

Headquarter & Production

Chaotian Industrial Park, Panyu, Guangzhou, China.

E: admin@shelter-structures.com

M: +86 139 2885 8552

W: www.shelter-structures.com

T: +8620 6660 3258