



SHELTER STRUCTURES

PRODUCT SPECIFICATIONS

SHELTER TFS-SERIES

TENT SPECIFICATIONS

Model	TFS25
Span Width	25m
Eave Height	4.00m
Ridge Height	10.30m
Bay Distance	5m
Roof Pitch	25°
Longest Component	9.11m
Maximum Length	Unlimited in 5-meter increments
Max. WindLoad	120km/h (0.60kN/m ²)

FRAMEWORK

Main Profiles	130*310*5mm (4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6

COVER


Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701

CONNECTING COMPONENTS


Hot Dipped, Structural Grade Corrosive Resistant Galvanized Steel

TFS-SERIES DRAWING


Rendering

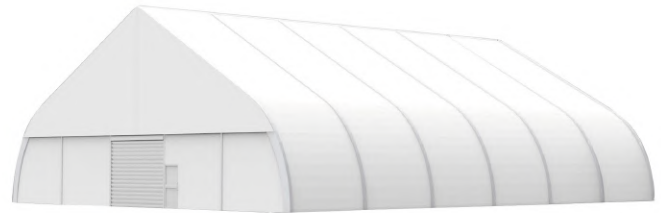

Gable Drawing

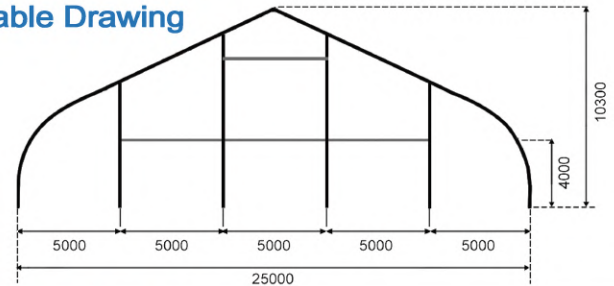

Frame Drawing

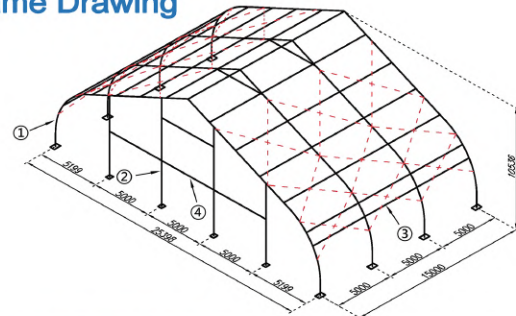

Profile Specifications

Roof Beam Upright Support ①	Gable Upright ②	Eave Purlin ③	Roof Purlin ④



SHELTER STRUCTURES
TENT MANUFACTURER

Headquarter & Production

Chaotian Industrial Park, Panyu, Guangzhou, China.

E: admin@shelter-structures.com

M: +86 139 2885 8552


W: www.shelter-structures.com

T: +8620 6660 3258



SHELTER STRUCTURES

PRODUCT GALLERY

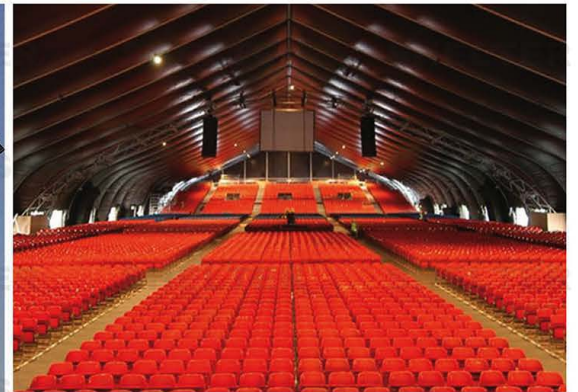


APPLICATION

- Airplane Hangar
- Sports Arena
- Industrial Warehouse
- Material Canopy in Mining Site
- Semi-permanent Theater
- Event Center
- Wedding Venue
- Temporary Church



FEATURES

- Snow-shedding Capabilities
- Modular, Expandable
- Limited Maintenance Required
- Ideal Option for Airplane Parking
- All-weather Resistance



SHELTER STRUCTURES
TENT MANUFACTURER

Headquarter & Production

Chaotian Industrial Park, Panyu,Guangzhou,China.

E: admin@shelter-structures.com

M: +86 139 2885 8552

W: www.shelter-structures.com

T: +8620 6660 3258